


IKA HS 260 Basic Horizontal Shaker, 20-300rpm Variable Speed, 3066601



SPECIFICATIONS

Type of movement	reciprocating
Shaker diameter	20 mm
Permissible shaking weight (incl. attachment)	7.5 kg
Motor rating input	45 W
Motor rating output	10 W
Permissible ON time	100 %
Speed min (adjustable)	20 rpm
Speed range	0 - 300 rpm
Speed display	LED line
Timer	yes
Timer display	LED line
Time setting range	5 - 50 min
Operating mode	timer and continuous operation
Shaking table lock	no
Dimensions (W x H x D)	360 x 100 x 420 mm
Weight	8.5 kg
Permissible ambient temperature	5 - 50 °C
Permissible relative humidity	80 %
Protection class according to DIN EN 60529	IP 21
RS 232 interface	no
Analog output	no
Voltage	220 - 240 / 100 - 120 V
Frequency	50/60 Hz
Power input	45 W

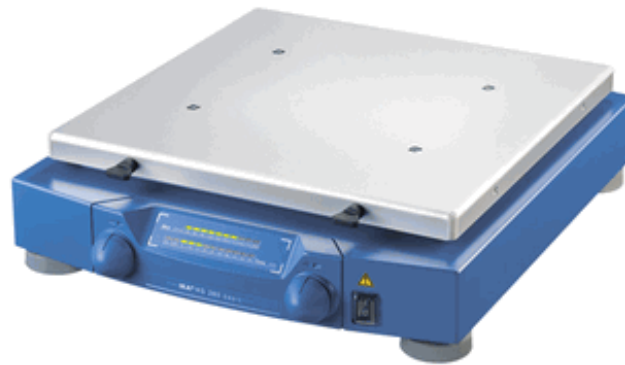