


## IKA IKAMAG RT 5 Power 5 Station Magnetic Hotplate Stirrer, 2930301



### SPECIFICATIONS

Number of stirring positions	5
Stirring quantity max. per stirring position (H <sub>2</sub> O)	0.4 l
Stirring position distance	90 mm
Speed deviation of individual stirring positions	5 %
Stirring quantity max. (H <sub>2</sub> O)	2 l
Motor rating input	7.2 W
Motor rating output	1.8 W
Speed range	0 - 1100 rpm
Stirring bar length max.	30 mm
Heat output	175 W
Heating temperature range	room temp. - 120 °C
Temperature medium max. (dep. on vessel)	70 °C
Heat control	scale 1-10
Speed control	scale 1-10
Temperature constancy in medium	2 ±K
Set-up plate material	silicone
Set-up plate dimensions	120 x 450 mm
Dimensions (W x H x D)	138 x 65 x 552 mm
Weight	3 kg
Permissible ambient temperature	5 - 40 °C
Permissible relative humidity	80 %
Protection class according to DIN EN 60529	IP 42
RS 232 interface	no
Analog output	no
Voltage	230 / 115 / 100 V
Frequency	50/60 Hz
Power input	185 W

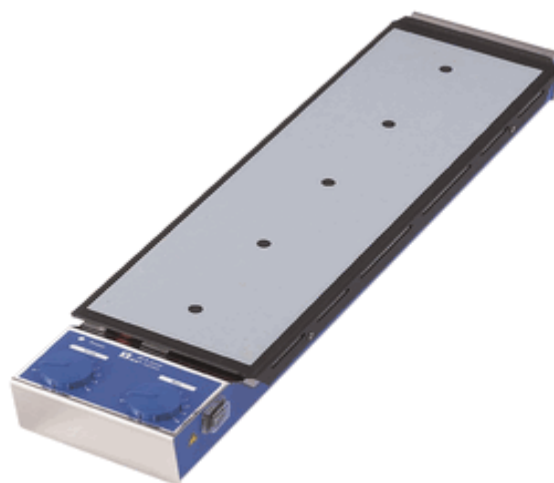