


## IKA IKAMAG RT 15 Power 15 Station Magnetic Hotplate Stirrer, 2930701



### SPECIFICATIONS

<b>Number of stirring positions</b>	15
<b>Stirring quantity max. per stirring position (H<sub>2</sub>O)</b>	0.4 l
<b>Stirring position distance</b>	90 mm
<b>Speed deviation of individual stirring positions</b>	5 %
<b>Stirring quantity max. (H<sub>2</sub>O)</b>	6 l
<b>Motor rating input</b>	21.6 W
<b>Motor rating output</b>	5.4 W
<b>Speed range</b>	0 - 1100 rpm
<b>Stirring bar length max.</b>	30 mm
<b>Heat output</b>	580 W
<b>Heating temperature range</b>	room temp. - 120 °C
<b>Temperature medium max. (dep. on vessel)</b>	70 °C
<b>Heat control</b>	scale 1-10
<b>Speed control</b>	scale 1-10
<b>Temperature constancy in medium</b>	2 ±K
<b>Set-up plate material</b>	silicone
<b>Set-up plate dimensions</b>	270 x 450 mm
<b>Dimensions (W x H x D)</b>	288 x 65 x 552 mm
<b>Weight</b>	6 kg
<b>Permissible ambient temperature</b>	5 - 40 °C
<b>Permissible relative humidity</b>	80 %
<b>Protection class according to DIN EN 60529</b>	IP 42
<b>Voltage</b>	230 / 115 / 100 V
<b>Frequency</b>	50/60 Hz
<b>Power input</b>	600 W

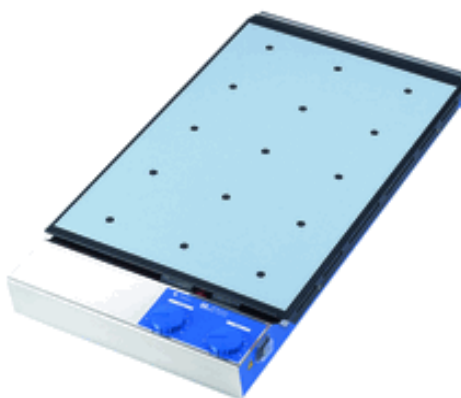